




FAG

UEL211

Plummer block housing unit

Plummer block housing units UELP, cast iron housing, with long base, radial insert ball bearing with eccentric locking collar, RSR seals

Informacje techniczne

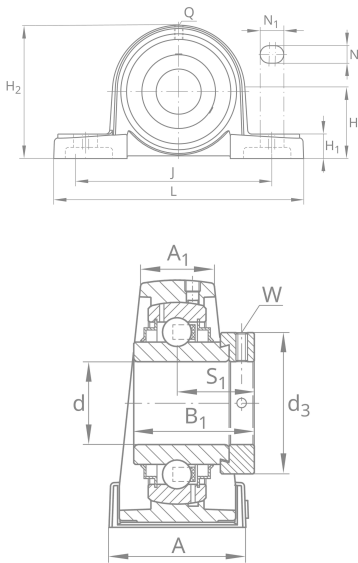

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Material	GG	Cast iron

Main Dimensions & Performance Data

d	55 mm	Bore diameter
L	219 mm	Length total
H ₂	126 mm	Height
C _r	46.000 N	Basic dynamic load rating, radial
C _{0r}	29.000 N	Basic static load rating, radial
≈m	3,69 kg	Masa

Mounting dimensions

J	171 mm	Distance fixing bore
N	20 mm	Width (slot)
N ₁	25 mm	Length (slot)



Dimensions

H	63,5 mm	Distance shaft axis
A	60 mm	Width (base)
A ₁	32 mm	Width (head)
H ₁	23 mm	Height (base)
B ₁	71,4 mm	Locking collar total width
S ₁	43,6 mm	Distance of raceway to locking collar
Q	M6	Connection thread for lubrication

Additional information

GEHP211-GG	Housing
UEL211	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.