






### UEL212

Plummer block housing unit

Plummer block housing units UELP, cast iron housing, with long base, radial insert ball bearing with eccentric locking collar, RSR seals

Informacje techniczne

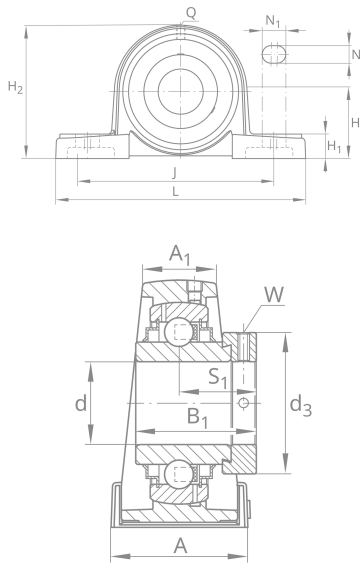

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
| Material | GG | Cast iron      |

Main Dimensions & Performance Data

|      |          |                                   |
|------|----------|-----------------------------------|
| d    | 60 mm    | Bore diameter                     |
| L    | 241 mm   | Length total                      |
| H 2  | 138 mm   | Height                            |
| C r  | 56.000 N | Basic dynamic load rating, radial |
| C 0r | 36.000 N | Basic static load rating, radial  |
| ≈m   | 4,94 kg  | Masa                              |

Mounting dimensions

|     |        |                      |
|-----|--------|----------------------|
| J   | 184 mm | Distance fixing bore |
| N   | 20 mm  | Width (slot)         |
| N 1 | 25 mm  | Length (slot)        |



Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| H              | 69,8 mm | Distance shaft axis                   |
| A              | 70 mm   | Width (base)                          |
| A <sub>1</sub> | 34 mm   | Width (head)                          |
| H <sub>1</sub> | 25 mm   | Height (base)                         |
| B <sub>1</sub> | 77,9 mm | Locking collar total width            |
| S <sub>1</sub> | 46,9 mm | Distance of raceway to locking collar |
| Q              | M6      | Connection thread for lubrication     |

Additional information

|            |                     |
|------------|---------------------|
| GEHP212-GG | Housing             |
| UEL212     | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |