


FAG

UKP206

Plummer block housing unit

Plummer block housing units UKP, cast iron housing, with long base, radial insert ball bearing with adapter sleeve, RSR seals

Informacje techniczne

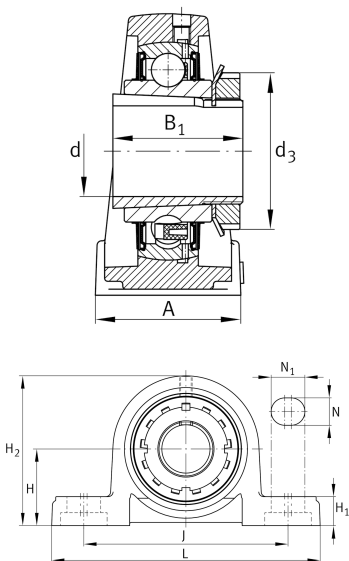

Twoja aktualna wersja produktu

|                   |    |                      |
|-------------------|----|----------------------|
| Material          | GG | Grey cast iron       |
| Housing clearance | J7 | Normal swivel torque |

Main Dimensions & Performance Data

|     |         |               |
|-----|---------|---------------|
| d   | 25 mm   | Bore diameter |
| L   | 165 mm  | Length total  |
| H 2 | 83 mm   | Height        |
| ≈m  | 1,35 kg | Masa          |

Mounting dimensions

|     |        |                      |
|-----|--------|----------------------|
| J   | 121 mm | Distance fixing bore |
| N   | 17 mm  | Width (slot)         |
| N 1 | 21 mm  | Length (slot)        |

Dimensions

|     |         |                                   |
|-----|---------|-----------------------------------|
| H   | 42,9 mm | Distance shaft axis               |
| A   | 48 mm   | Width (base)                      |
| H 1 | 17 mm   | Height (base)                     |
| B 1 | 38 mm   | Locking collar total width        |
| Q   | M6      | Connection thread for lubrication |



Additional information

|       |                     |
|-------|---------------------|
| P206  | Housing             |
| UK206 | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |