**FAG****UKP212**

Plummer block housing unit

Plummer block housing units UKP, cast iron housing, with long base, radial insert ball bearing with adapter sleeve, RSR seals

Informacje techniczne

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Housing clearance	J7	Normal swivel torque

Main Dimensions & Performance Data


d	55 mm	Bore diameter
L	241 mm	Length total
H ₂	138 mm	Height
≈m	4,71 kg	Masa

Mounting dimensions

J	184 mm	Distance fixing bore
N	20 mm	Width (slot)
N ₁	25 mm	Length (slot)

Dimensions

H	69,8 mm	Distance shaft axis
A	70 mm	Width (base)
H ₁	25 mm	Height (base)
B ₁	62 mm	Locking collar total width
Q	M6	Connection thread for lubrication

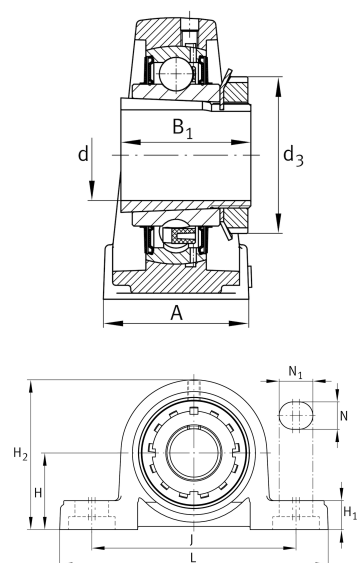



Additional information

P212	Housing
UK212	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.