


FAG

UKP218

Plummer block housing unit

Plummer block housing units UKP, cast iron housing, with long base, radial insert ball bearing with adapter sleeve, RSR seals

Informacje techniczne

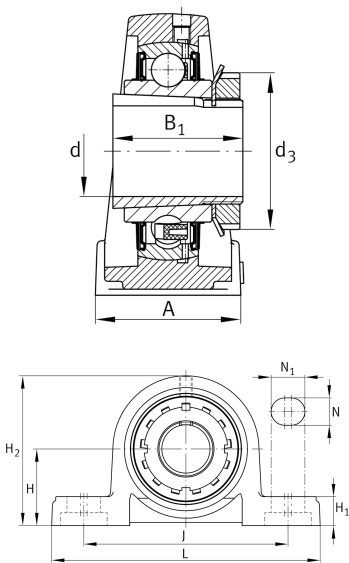

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Housing clearance	J7	Normal swivel torque

Main Dimensions & Performance Data

d	80 mm	Bore diameter
L	327 mm	Length total
H 2	200 mm	Height
≈m	12,71 kg	Masa

Mounting dimensions

J	262 mm	Distance fixing bore
N	27 mm	Width (slot)
N 1	33 mm	Length (slot)

Dimensions

H	101,6 mm	Distance shaft axis
A	88 mm	Width (base)
H 1	33 mm	Height (base)
B 1	86 mm	Locking collar total width
Q	M6	Connection thread for lubrication



Additional information

P218	Housing
UK218	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.