



24.08.2026, 19:25:27 UTC


SCHAEFFLER



VUS26086-A

Adjusting gib

Informacje techniczne

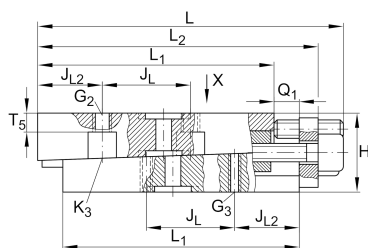


Twoja aktualna wersja produktu

Main Dimensions & Performance Data

L	97 mm	Length max
H	25 mm	Height min
B	39,5 mm	Width
m	0,588 kg	Masa

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

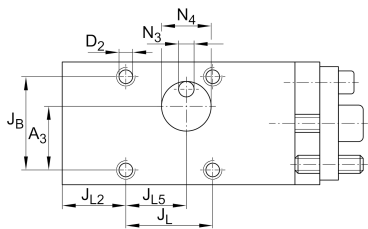

Mounting dimensions

L 1	75 mm	
L 2	89 mm	Max
J B	30 mm	
Tol J B	+ 0,1 mm	Upper tolerance
Tol J B	- 0,1 mm	Lower tolerance
J L	28 mm	
Tol J L	+ 0,1 mm	Upper tolerance
Tol J L	- 0,1 mm	Lower tolerance
J L2	20,5 mm	
J L5	19,5 mm	
Q 1	8 mm	Max
A 3	20,5 mm	
N 3	5 mm	
N 4	16 mm	
T 5	6 mm	



Additional information

S 1	6 mm	Adjustment screw hexagon socket
S 2	3 mm	Locking/extraction screw hexagon socket
G 2	M6	Fixing screws DIN ISO4762-12.9
M A G2	17 Nm	Tightening torque
G 3	M4	Fixing screws DIN ISO4762-12.9
M A G3	5 Nm	Tightening torque
K 3	M4	Fixing screws DIN ISO4762-12.9
M A K3	5 Nm	Tightening torque
D 2	4,9 mm	Core hole
Δh	0,4 mm	Adjustment max
	0,05 mm	Adjustment per screw revolution

Related products

RUS26086	For linear roller bearing
----------	---------------------------