
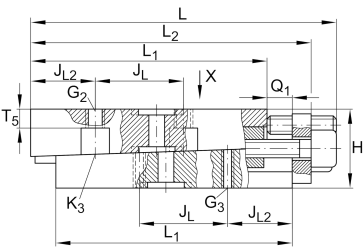


VUS38206-A

Adjusting gib

Informacje techniczne




Twoja aktualna wersja produktu

Size 38206

Version A

Main Dimensions & Performance Data

|    |         |            |
|----|---------|------------|
| L  | 250 mm  | Length max |
| H  | 25 mm   | Height min |
| B  | 51,5 mm | Width      |
| ≈m | 2,08 kg | Masa       |

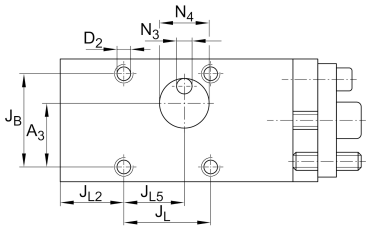

Mounting dimensions

|         |          |                 |
|---------|----------|-----------------|
| L 1     | 200 mm   |                 |
| L 2     | 240 mm   | Max             |
| J B     | 41 mm    |                 |
| Tol J B | + 0,1 mm | Upper tolerance |
| Tol J B | - 0,1 mm | Lower tolerance |
| J L     | 102 mm   |                 |
| Tol J L | + 0,1 mm | Upper tolerance |
| Tol J L | - 0,1 mm | Lower tolerance |
| J L2    | 49 mm    |                 |
| J L5    | 61 mm    |                 |
| Q 1     | 30 mm    | Max             |
| A 3     | 28,25 mm |                 |
| N 3     | 5 mm     |                 |
| N 4     | 22 mm    |                 |
| T 5     | 5 mm     |                 |

Additional information

|        |         |                                         |
|--------|---------|-----------------------------------------|
| S 1    | 8 mm    | Adjustment screw hexagon socket         |
| S 2    | 5 mm    | Locking/extraction screw hexagon socket |
| G 3    | M6      | Fixing screws DIN ISO4762-12.9          |
| M A G3 | 17 Nm   | Tightening torque                       |
| K 3    | M6      | Fixing screws DIN ISO4762-12.9          |
| M A K3 | 17 Nm   | Tightening torque                       |
| D 2    | 6,9 mm  | Core hole                               |
| Δh     | 1 mm    | Adjustment max                          |
|        | 0,05 mm | Adjustment per screw revolution         |



Wyświetl szczegóły produktu na platformie medias

24.08.2026, 20:18:30 UTC

**SCHAEFFLER**

### Related products

---

RUS38206

For linear roller bearing