


VUS65210

Adjusting gib

Informacje techniczne




Twoja aktualna wersja produktu

Size 65210

Main Dimensions & Performance Data

L	234 mm	Length max
H	38 mm	Height min
B	75 mm	Width
≈m	4,5 kg	Masa

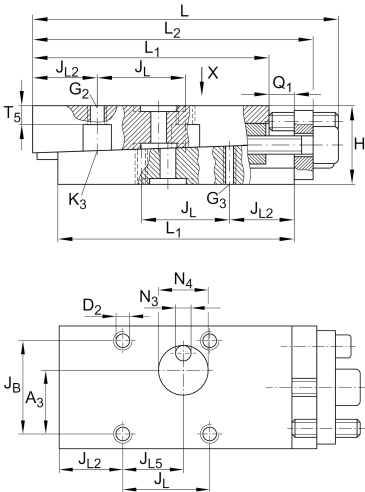

Mounting dimensions

L 1	200 mm	
L 2	220 mm	Max
J B	62 mm	
Tol J B	+ 0,1 mm	Upper tolerance
Tol J B	- 0,1 mm	Lower tolerance
J L	76 mm	
Tol J L	+ 0,1 mm	Upper tolerance
Tol J L	- 0,1 mm	Lower tolerance
J L2	62 mm	
J L5	40,5 mm	
Q 1	10 mm	Max
A 3	30,9 mm	
A 4	21,6 mm	
N 3	8 mm	
N 4	8 mm	
T 5	7 mm	



Additional information

S 1	12 mm	Adjustment screw hexagon socket
S 2	5 mm	Locking/extraction screw hexagon socket
G 2	M10	Fixing screws DIN ISO4762-12.9
M A G2	83 Nm	Tightening torque
G 3	M8	Fixing screws DIN ISO4762-12.9
M A G3	41 Nm	Tightening torque
K 3	M8	Fixing screws DIN ISO4762-12.9
M A K3	41 Nm	Tightening torque
D 2	9 mm	Core hole
Δh	0,5 mm	Adjustment max
	0,075 mm	Adjustment per screw revolution

Related products

RUS65210	For linear roller bearing
----------	---------------------------