


VUS85280 

Adjusting gib

Informacje techniczne




Twoja aktualna wersja produktu

Size 85280

Main Dimensions & Performance Data

L	314 mm	Length max
H	38 mm	Height min
B	100 mm	Width
≈m	8,37 kg	Masa

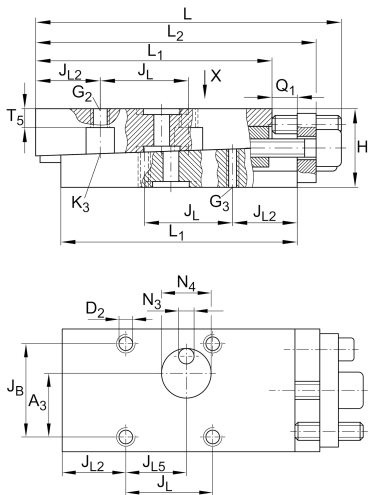

Mounting dimensions

L 1	280 mm	
L 2	300 mm	Max
J B	82,5 mm	
Tol J B	+ 0,1 mm	Upper tolerance
Tol J B	- 0,1 mm	Lower tolerance
J L	101,5 mm	
Tol J L	+ 0,1 mm	Upper tolerance
Tol J L	- 0,1 mm	Lower tolerance
J L2	89 mm	
J L5	53,5 mm	
Q 1	10 mm	Max
A 3	41,25 mm	
A 4	25 mm	
N 3	8 mm	
N 4	10 mm	
T 5	6 mm	



Additional information

S 1	12 mm	Adjustment screw hexagon socket
S 2	4 mm	Locking/extraction screw hexagon socket
G 2	M14	Fixing screws DIN ISO4762-12.9
M A G2	220 Nm	Tightening torque
G 3	M10	Fixing screws DIN ISO4762-12.9
M A G3	83 Nm	Tightening torque
K 3	M10	Fixing screws DIN ISO4762-12.9
M A K3	83 Nm	Tightening torque
D 2	12,5 mm	Core hole
Δh	0,5 mm	Adjustment max
	0,075 mm	Adjustment per screw revolution

Related products

RUS85280	For linear roller bearing
----------	---------------------------