**ZARF30105-TV**

Needle roller/axial cylindrical roller bearing

Needle roller/axial cylindrical roller bearings
ZARF, double direction, for screw mounting

Informacje techniczne

Twoja aktualna wersja produktu





Cage	TV	Plastic Cage made from PA66
------	----	-----------------------------

Main Dimensions & Performance Data

d	30 mm	Bore diameter
D	105 mm	Outside diameter
H	66 mm	Height
C _a	107.000 N	Basic dynamic load rating, axial
C _{0a}	265.000 N	Basic static load rating, axial
C _r	26.000 N	Basic dynamic load rating, radial
C _{0r}	47.000 N	Basic static load rating, radial
C _{ua}	22.900 N	Fatigue load limit, axial
C _{ur}	6.800 N	Fatigue load limit, radial
n _{G Oil}	4.400 1/min	Limiting speed for oil lubrication
n _{G Grease}	1.300 1/min	Limiting speed for grease lubrication
M _{RL}	2,1 Nm	Bearing friction torque
≈m	1,81 kg	Masa


Mounting dimensions

D _{a max}	69 mm	Maximum diameter of housing shoulder
d _{a min}	52 mm	Minimum diameter shaft shoulder
t ₁	0,2 mm	Position bore in the housing

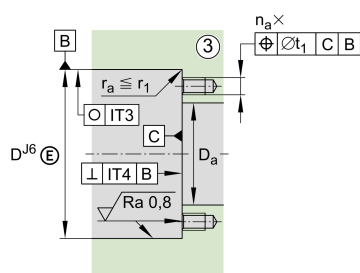



25.08.2026, 10:55:19 UTC



Dimensions

H ₁	41 mm	Height outer ring over wave washer
C	18 mm	Width, outer ring
C ₁	10 mm	Distance to lubrication hole
D ₁	68 mm	Rip diameter shaft washer
B	14 mm	Width inner ring
r _{min}	0,3 mm	Minimum chamfer dimension
r _{1 min}	0,6 mm	Minimum chamfer dimension
d ₁	3,2 mm	Diameter lubrication hole
J	85 mm	Pitch circle diameter (holes)
n	12	Number of screwing holes
n x t	30 °	Split

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Additional information

c_{aL}	3.300 N/ μ m	Rigidity axial
c_{kL}	1.100 Nm/mrad	Tilting stiffness
M_m	6,53 kg*cm2	Mass moment of inertia
	1 μ m	Axial runout
radial	ZMA30/65	Recommended INA precision locknut for radial locking (not included)
axial	AM30	Recommended INA precision locknut for axial locking (not included)
M_A	75 Nm	Tightening torque nut
	24.287 N	Required locknut force
	M8	Screw size
n_a	12	Number of screws
na x ta	30 °	Division (screwing holes)

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia