


**ZARF40100-L-TV**

Needle roller/axial cylindrical roller bearing

Needle roller/axial cylindrical roller bearings
ZARF..-L, double direction, for screw
mounting, long shaft locating washer

Informacje techniczne

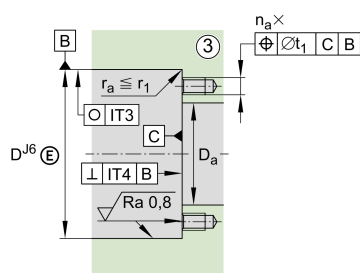


Twoja aktualna wersja produktu

Cage	TV	Plastic Cage made from PA66
Locating Feature , bearing outer ring	L	Stepped shaft locating washer extended on one side

Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	100 mm	Outside diameter
H	70 mm	Hight
C _a	59.000 N	Basic dynamic load rating, axial
C _{0a}	163.000 N	Basic static load rating, axial
C _r	27.500 N	Basic dynamic load rating, radial
C _{0r}	53.000 N	Basic static load rating, radial
C _{ua}	14.200 N	Fatigue load limit, axial
C _{ur}	7.600 N	Fatigue load limit, radial
n _{G Oil}	4.400 1/min	Limiting speed for oil lubrication
n _{G Grease}	1.600 1/min	Limiting speed for grease lubrication
M _{RL}	1 Nm	Bearing friction torque
≈m	1,299 kg	Masa



Mounting dimensions

$D_{a \max}$	66 mm	Maximum diameter of housing shoulder
$d_{a \min}$	48 mm	Minimum diameter shaft shoulder
t_1	0,2 mm	Position bore in the housing

Dimensions

H_1	51 mm	Height outer ring over wave washer
C	18 mm	Width, outer ring
C_1	10 mm	Distance to lubrication hole
D_1	65 mm	Rip diameter shaft washer
D_2	50 mm	Heeldiameter wave washer long
D_3	63 mm	Outside diameter wave washer long
B	11 mm	Width, wave washer
B_1	27 mm	Width wave washer long
B_2	14 mm	Width heel wave washer long
$r_{\min}$	0,3 mm	Minimum chamfer dimension
$r_{1 \min}$	0,6 mm	Minimum chamfer dimension
d_1	3,2 mm	Diameter lubrication hole
J	80 mm	Pitch circle diameter (holes)
n	8	Number of screwing holes
$n \times t$	45 °	Split

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.



Additional information

c_{aL}	2.800 N/ μ m	Rigidity axial
c_{kL}	1.030 Nm/mrad	Tilting stiffness
M_m	4,35 kg*cm2	Mass moment of inertia
	1 μ m	Axial runout
radial	ZMA40/62	Recommended INA precision locknut for radial locking (not included)
axial	AM40	Locknut 2
M_A	55 Nm	Tightening torque nut
	14.240 N	Preload force axial
	50X65X8	Sealing ring
	M8	Screw size
n_a	8	Number of screws
na x ta	45 °	Division (screwing holes)

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia