




ZKLDF325

Axial angular contact ball bearing

Axial angular contact ball bearings ZKLDF, double direction, for screw mounting, sealing shields on both sides

Informacje techniczne

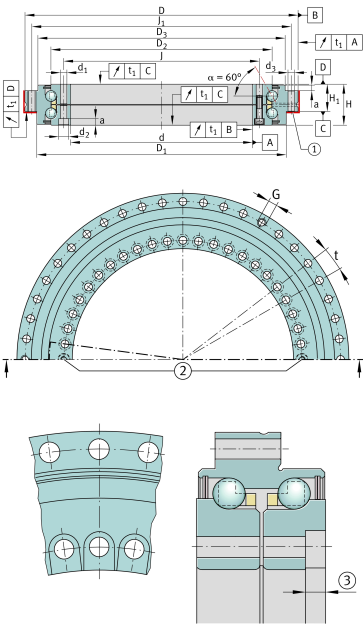

Twoja aktualna wersja produktu

Generation B

Main Dimensions & Performance Data

d	325 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,023 mm	Bore diameter lower tolerance
D	450 mm	Flange diameter
	0 mm	Flange diameter upper tolerance
	-0,023 mm	Flange diameter lower tolerance
H	60 mm	Height
n _G	2.000 1/min	Limiting speed
C _a	172.000 N	Basic dynamic load rating, axial
C _{0a}	1.110.000 N	Basic static load rating, axial
C _{ua}	26.000 N	Fatigue load limit, axial
≈m	24,8 kg	Masa



Mounting dimensions

J	342 mm	Pitch circle diameter fixing holes in inner ring
J ₁	430 mm	Pitch circle diameter fixing holes in outer ring
d ₁	9,3 mm	Fixing holes diameter inner ring
d ₂	15 mm	Counterbore diameter of fixing holes
a	8,2 mm	Counterbore depth of fixing holes
	34	Quantity of fixing holes inner ring
d ₃	9,3 mm	Fixing holes diameter outer ring
	33	Quantity of fixing holes outer ring
n	36	Pitch quantity
t	10 °	Pitch separation angle
G	M12	Threaded extraction hole
	3	Quantity of threaded extraction hole
M _A	34 Nm	Screw tightening torque
	2	Quantity of retaining screws

Dimensions

H ₁	40 mm	Height contact face outer ring
	0,2 mm	Height contact face outerring H1 upper tolerance
	-0,2 mm	Height contact face outerring H1 lower tolerance
D ₁	415 mm	Outside diameter D1
D ₂	380 mm	Rib diameter inner ring
D ₃	413 mm	Outside diameter D3
t ₁	6 µm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Additional information

c_{aL}	4.000 N/ μ m	Axial rigidity of bearing position
c_{rL}	800 N/ μ m	Radial rigidity of bearing position
c_{kL}	60.000 Nm/mrad	Tilting rigidity of bearing position
c_{aL}	5.400 N/ μ m	Axial rigidity of rolling element set
c_{rW}	800 N/ μ m	Radial rigidity of rolling element set
c_{kW}	90.000 Nm/mrad	Tilting rigidity of rolling element set

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Momenty względem wszystkich osi
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne
-  Łożysko gabarytowe