




**ZKLF2068-2RS-2AP-XL**

Axial angular contact ball bearing

Axial angular contact ball bearings  
ZKLF..-2RS-2AP-XL, matched pair, double  
direction, lip seals on both sides





X-life

Informacje techniczne

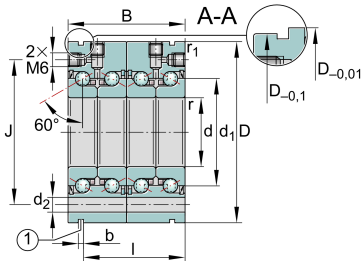

Twoja aktualna wersja produktu

|                    |          |                                                      |
|--------------------|----------|------------------------------------------------------|
| Number of bearings | 2AP      | Axial angular contact ball bearings,<br>matched pair |
| Sealing            | 2RS      | Contact lip seals on both sides                      |
| Tolerance class    | Standard |                                                      |

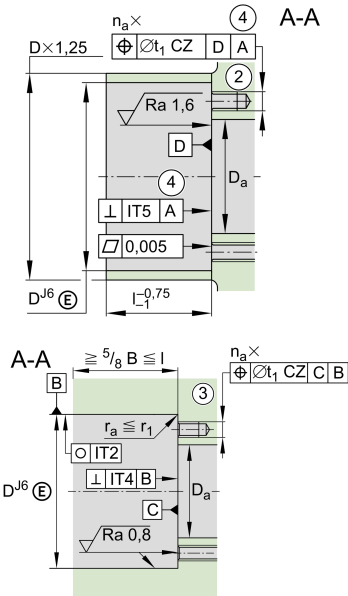

### Main Dimensions & Performance Data

|                          |             |                                       |
|--------------------------|-------------|---------------------------------------|
| d                        | 20 mm       | Bore diameter                         |
|                          | 0 mm        | Bore diameter upper tolerance         |
|                          | -0,005 mm   | Bore diameter lower tolerance         |
| D                        | 68 mm       | Outside diameter                      |
|                          | 0 mm        | Outside diameter upper tolerance      |
|                          | -0,01 mm    | Outside diameter lower tolerance      |
| B                        | 56 mm       | Width                                 |
|                          | 0 mm        | Width upper tolerance                 |
|                          | -0,5 mm     | Width lower tolerance                 |
| C <sub>a</sub>           | 46.000 N    | Basic dynamic load rating, axial      |
| C <sub>0a</sub>          | 94.000 N    | Basic static load rating, axial       |
| C <sub>ua</sub>          | 5.700 N     | Fatigue load limit, axial             |
| n <sub>G</sub><br>Grease | 6.600 1/min | Limiting speed for grease lubrication |
| n <sub>g</sub>           | 3.000 1/min | Thermally safe operating speed        |
| M <sub>R</sub>           | 0,45 Nm     | Bearing frictional torque             |
| ≈m                       | 1,14 kg     | Masa                                  |

### Mounting dimensions

|                    |        |                                                          |
|--------------------|--------|----------------------------------------------------------|
| D <sub>a</sub> max | 43 mm  | Maximum diameter of housing                              |
| d <sub>a</sub> min | 25 mm  | Minimum diameter shaft                                   |
| t <sub>1</sub>     | 0,1 mm | Position tolerance of bore in the housing                |
|                    | M6X70  | Size of fixing screws                                    |
| n <sub>a</sub>     | 7      | Number of holes in adjacent construction                 |
| t <sub>a</sub>     | 45 °   | Pitch separation angle of holes in adjacent construction |
|                    | M6     | Connection thread for lubrication                        |



Dimensions

|                    |         |                                        |
|--------------------|---------|----------------------------------------|
| d <sub>1</sub>     | 34,5 mm | Rib diameter inner ring                |
| r <sub>min</sub>   | 0,3 mm  | Minimum chamfer dimension              |
| r <sub>1 min</sub> | 0,6 mm  | Minimum chamfer dimension              |
| J                  | 53 mm   | Pitch circle diameter fixing holes     |
| d <sub>2</sub>     | 6,8 mm  | Fixing holes diameter                  |
| b                  | 3 mm    | Width of extraction slot               |
| l                  | 47 mm   | Distance of extraction slot            |
| n                  | 7       | Pitch quantity of fixing holes         |
| t                  | 45 °    | Pitch separation angle of fixing holes |
| a                  | 60 °    | Contact angle                          |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |

Additional information

|                 |              |                                                             |
|-----------------|--------------|-------------------------------------------------------------|
| c <sub>aL</sub> | 1.150 N/μm   | Rigidity axial                                              |
| c <sub>kL</sub> | 320 Nm/mrad  | Tilting rigidity                                            |
| M <sub>m</sub>  | 0,564 kg*cm2 | Mass moment of inertia                                      |
|                 | 2 μm         | Axial runout                                                |
|                 | ZMA20/38     | Recommended INA precision locknut for radial locking        |
|                 | AM20         | Recommended INA precision locknut for axial locking         |
| M <sub>A</sub>  | 18 Nm        | Tightening torque for the recommended INA precision locknut |
|                 | 8.258 N      | Required locknut force axial                                |



### Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne