




ZKLF50115-2RS-2AP-XL

Axial angular contact ball bearing

Axial angular contact ball bearings
ZKLF..-2RS-2AP-XL, matched pair, double
direction, lip seals on both sides





X-life

Informacje techniczne

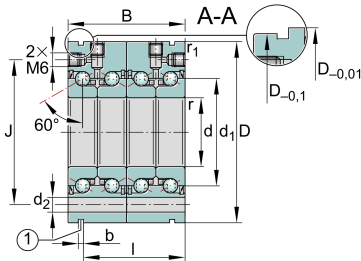

Twoja aktualna wersja produktu

Number of bearings	2AP	Axial angular contact ball bearings, matched pair
Sealing	2RS	Contact lip seals on both sides
Tolerance class	Standard	

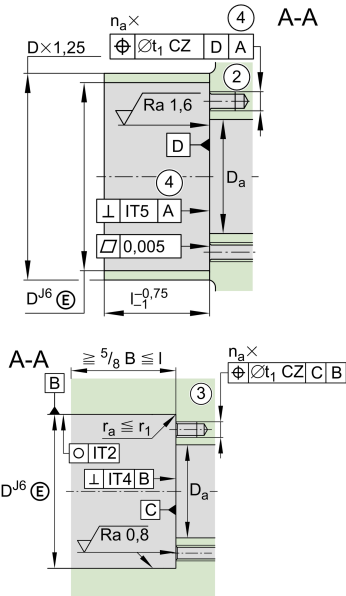

Main Dimensions & Performance Data

d	50 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,005 mm	Bore diameter lower tolerance
D	115 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,01 mm	Outside diameter lower tolerance
B	68 mm	Width
	0 mm	Width upper tolerance
	-0,5 mm	Width lower tolerance
C _a	83.000 N	Basic dynamic load rating, axial
C _{0a}	250.000 N	Basic static load rating, axial
C _{ua}	15.300 N	Fatigue load limit, axial
n _G Grease	3.200 1/min	Limiting speed for grease lubrication
n _g	1.500 1/min	Thermally safe operating speed
M _R	1,35 Nm	Bearing frictional torque
≈m	3,584 kg	Masa

Mounting dimensions

D _{a max}	82 mm	Maximum diameter of housing
d _{a min}	63 mm	Minimum diameter shaft
t ₁	0,2 mm	Position tolerance of bore in the housing
	M8X80	Size of fixing screws
n _a	11	Number of holes in adjacent construction
t _a	30 °	Pitch separation angle of holes in adjacent construction
	M6	Connection thread for lubrication



Dimensions

d ₁	72 mm	Rib diameter inner ring
r _{min}	0,3 mm	Minimum chamfer dimension
r _{1 min}	0,6 mm	Minimum chamfer dimension
J	94 mm	Pitch circle diameter fixing holes
d ₂	8,8 mm	Fixing holes diameter
b	3 mm	Width of extraction slot
l	59 mm	Distance of extraction slot
n	11	Pitch quantity of fixing holes
t	30 °	Pitch separation angle of fixing holes
a	60 °	Contact angle

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Additional information

c _{aL}	2.200 N/μm	Rigidity axial
c _{kL}	2.250 Nm/mrad	Tilting rigidity
M _m	10,48 kg*cm2	Mass moment of inertia
	2,5 μm	Axial runout
	ZMA50/75	Recommended INA precision locknut for radial locking
	AM50	Recommended INA precision locknut for axial locking
M _A	85 Nm	Tightening torque for the recommended INA precision locknut
	16.280 N	Required locknut force axial



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne