


# ZM150

Precision locknut

Precision locknut ZM, accessory ZM..

## Informacje techniczne

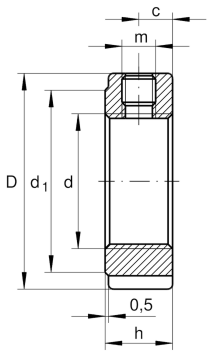





### Main Dimensions & Performance Data

| | | |
|---|---|---|
| d | M150X2 | Thread |
| D | 195 mm | Outside diameter |
| h | 26 mm | Height |
| $M_A$ | 38 Nm | Mounting torque set screw |
| $F_{aB}$ | 750.000 N | Breaking load, axial |
| $M_L$ | 900 Nm | Breakawag |
| $M_{AL}$ | 650 Nm | Mounting torque reference |
| $M_M$ | 188 kg*cm2 | Mass moment of inertia |
| ≈m | 2,24 kg | Masa |

### Dimensions

| | | |
|---|---|---|
| $d_1$ | 171 mm | Plant diameter outside |
| t | 6 mm | Hight retaining slot |
| b | 14 mm | Width retaining slot |
| c | 13 mm | Distance bore |
| m | M12 | Threaded - threaded pin |

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje