

AXK0821-TV

Axial needle roller and cage assembly

Axial needle roller and cage assemblies,
single direction, to DIN 5405-2

Informacje techniczne

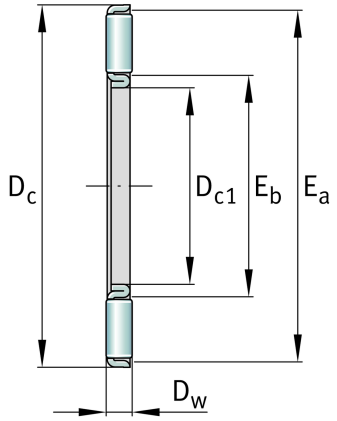

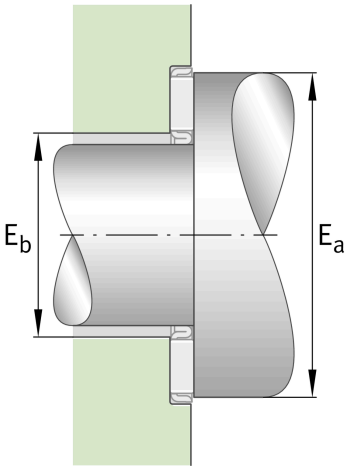

Main Dimensions & Performance Data

D_{c1}	8 mm	Bore diameter cage
D_c	21 mm	Outside diameter
D_w	2 mm	Rolling element diameter
E_a	20 mm	Raceway dimension
E_b	9 mm	Raceway dimension
c_a	7.800 N	Basic dynamic load rating, axial
c_{0a}	19.400 N	Basic static load rating, axial
c_{ua}	2.010 N	Fatigue load limit, axial
n_G	17.700 1/min	Limiting speed
$n_{\vartheta r}$	8.800 1/min	Reference speed
≈m	1,5 g	Masa

Additional information

	AS0821	Axial bearing washer

Właściwości

- Fa — Obciążenie osiowe jednokierunkowe
- Smarowanie smarem
- Smarowanie olejem
- Bez uszczelnienia
- Mała przestrzeń zabudowy

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje