
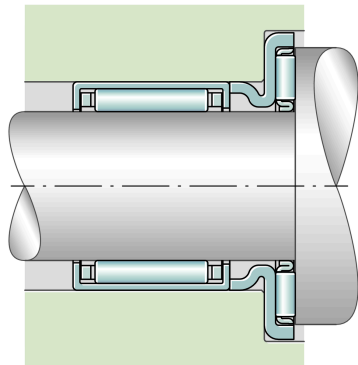


AXW30

Axial needle roller bearing



Axial needle roller bearings, single direction,
AXK with axial bearing washer

Informacje techniczne



Main Dimensions & Performance Data

D _{c1}	30 mm	Bore diameter cage
D	50 mm	Outside diameter bearing washer
B	3,2 mm	Height bearing
B ₁	4 mm	Height centering collar
D ₁	37 mm	Outside diameter centering collar
E _a	46 mm	Raceway dimension
E _b	34 mm	Raceway dimension
C	16.400 N	Basic dynamic load rating, axial
C _{0a}	70.000 N	Basic static load rating, axial
c _{ua}	7.200 N	Fatigue load limit, axial
n _G	7.500 1/min	Limiting speed
n _{gr}	3.800 1/min	Reference speed
≈m	23,41 g	Masa

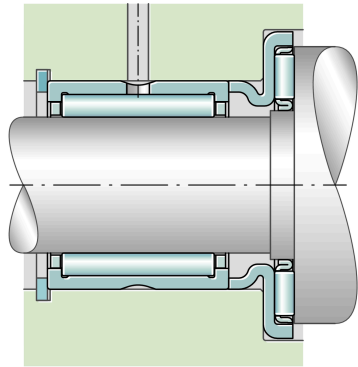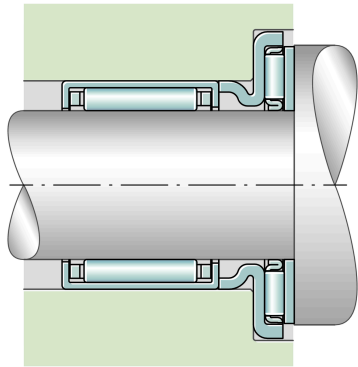

Additional information

AS3047	Axial bearing washer
HK3018-RS	Drawn cup needle roller bearings turned
HK3016	Drawn cup needle roller bearings
HK3020	Drawn cup needle roller bearings
HK3026	Drawn cup needle roller bearings
HK3038-ZW	Drawn cup needle roller bearings
HK3012	Drawn cup needle roller bearings for radial bearing arrangement
BK3012	Needle bush
BK3016	Needle bush
BK3020	Needle bush
BK3026	Needle bush
BK3038-ZW	Needle bush
NA4904	Needle roller bearings with inner ring
NA6904	Needle roller bearings with inner ring
NK28/20	Needle roller bearings with out inner ring
NK28/30	Needle roller bearings with out inner ring
NKS24	Needle roller bearings with out inner ring
RNA4904	Needle roller bearings with out inner ring
RNA6904	Needle roller bearings with out inner ring

Właściwości

-  Obciążenie osiowe jednokierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Mała przestrzeń zabudowy