
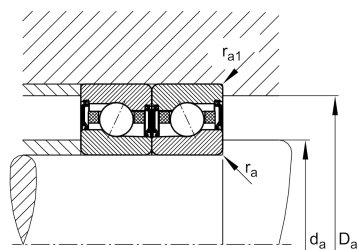



**FAG****HCM7013-C-2RSD-T-P4S-UL-XL**

High speed spindle bearing

High speed spindle bearing HCM70...-C-2RSD, adjusted, in pairs or sets, contact angle $\alpha = 17^\circ$, with ceramic balls, lip seals on both sides, non-contact, restricted tolerances

Informacje techniczne



Twoja aktualna wersja produktu

Preload class	L	Preload light
Contact angle	Contact angle 17°	Contact angle 17°
Type of Seal	2RSD	Non-contact sealed on both sides and greased "for life"
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to ISO 492:2023
Arrangement bearing set	U	Single bearing

Main Dimensions & Performance Data

d	65 mm	Bore diameter
D	100 mm	Outside diameter
B	18 mm	Width
C_r	20.100 N	Basic dynamic load rating, radial
C_{0r}	11.600 N	Basic static load rating, radial
C_{ur}	940 N	Fatigue load limit, radial
n_G Grease	24.000 1/min	Limiting speed for grease lubrication
$\approx m$	422,5 g	Masa



Mounting dimensions

d_a	72 mm	Diameter shaft shoulder
d_a	h12	Diameter shaft shoulder clearance
D_a	93 mm	Shoulder diameter outer ring
D_a	H12	Shoulder diameter outer ring clearance
$r_{a \max}$	1 mm	Maximum recess radius
$r_{a1 \max}$	0,6 mm	Maximum recess radius
a	21,6 mm	Distance between the apexes of the pressure cones

Dimensions

$r_{\min}$	1,1 mm	Minimum chamfer dimension
$r_{1 \min}$	0,6 mm	Minimum chamfer dimension
α	17 °	Contact angle

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	80 °C	Operating temperature max.

Additional information

F_{VL}	90 N	Preload force light
F_{VM}	237 N	Preload force medium
F_{VH}	498 N	Preload force heavy
K_{aEL}	262 N	Lift-off force light
K_{aEM}	707 N	Lift-off force medium
K_{aEH}	1.528 N	Lift-off force heavy
c_{aL}	59 N/μm	Axial rigidity light
c_{aM}	85 N/μm	Axial rigidity medium
c_{aH}	115 N/μm	Axial rigidity heavy



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne