




RASEY50-TV-VA-HLA

Plummer block housing unit

Plummer block housing unit RASEY..-TV-VA,  
RIBB plastic

Informacje techniczne

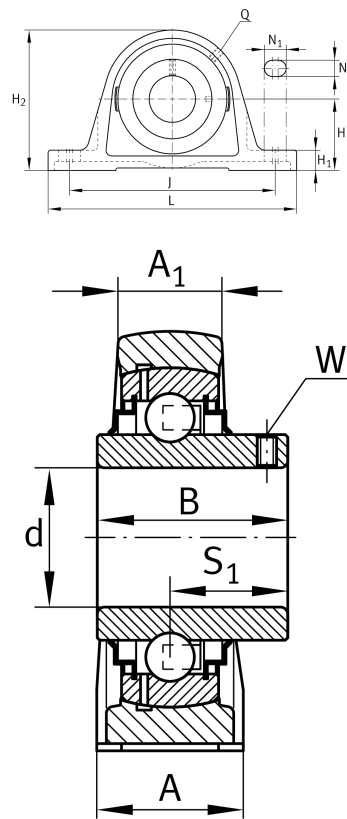

Twoja aktualna wersja produktu

|                             |    |                               |
|-----------------------------|----|-------------------------------|
| Special material            | TV | Plastic housing               |
| Corrosion resistant bearing | VA | Corrosion-resistant VA design |
| Material                    | TV | Plastic                       |

Main Dimensions & Performance Data

|     |          |               |
|-----|----------|---------------|
| d   | 50 mm    | Bore diameter |
| L   | 206 mm   | Length        |
| H 2 | 114 mm   | Height        |
| ≈m  | 1,304 kg | Masa          |

Mounting dimensions

|     |        |                      |
|-----|--------|----------------------|
| J   | 159 mm | Distance fixing bore |
| N   | 17 mm  | Width (slot)         |
| N 1 | 20 mm  | Length (slot)        |

Dimensions

|     |              |                                   |
|-----|--------------|-----------------------------------|
| H   | 57,2 mm      | Distance shaft axis               |
| A   | 60 mm        | Width (base)                      |
| H 1 | 23 mm        | Height (base)                     |
| S   | 32,6 mm      | Distance raceway                  |
| B   | 51,6 mm      | Width                             |
| Q   | 1/4 - 28 UNF | Connection thread for lubrication |



### Additional information

|                          |                     |
|--------------------------|---------------------|
| GEH.ASE10-TV             | Housing             |
| GYE50-KRR-B-FA107-VA-HLA | Bearing designation |
| KASK10-S-G               | End cap             |
| KASK10-S-R-NBR           | Open protecting cap |

### Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |