

**YRTSMA460** **Axial/radial roller bearing**


Axial/radial bearings, double direction, screw mounting, for higher speeds, with integrated absolute angular measuring system

Informacje techniczne**Twoja aktualna wersja produktu**

Angular measuring system integrated	MA	With an absolute angular measuring system
-------------------------------------	----	---

Main Dimensions & Performance Data

d	460 mm	Bore diameter
	0 mm	Bore diameter upper tolerance
	-0,023 mm	Bore diameter lower tolerance
D	600 mm	Outside diameter
	0 mm	Outside diameter upper tolerance
	-0,028 mm	Outside diameter lower tolerance
H	70 mm	Height
C _r	168.000 N	Basic dynamic load rating, radial
C _{0r}	570.000 N	Basic static load rating, radial
C _a	221.000 N	Basic dynamic load rating, axial
C _{0a}	1.690.000 N	Basic static load rating, axial
n _G	560 1/min	Limiting speed
≈m	45 kg	Masa

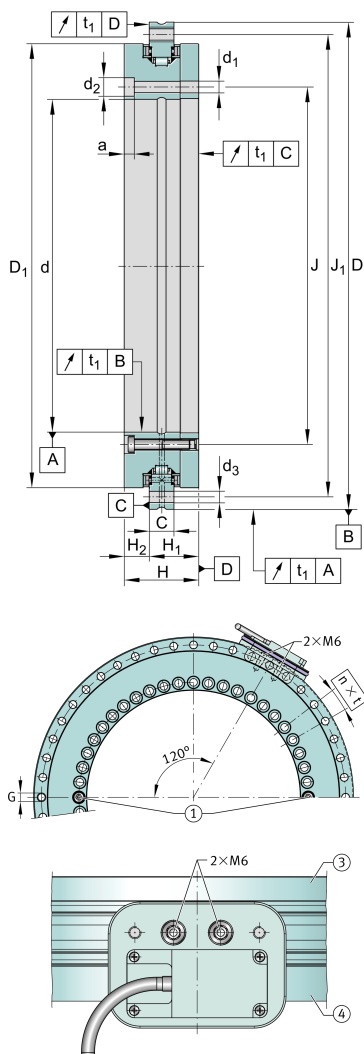



Mounting dimensions

J	482 mm	Pitch circle diameter fixing holes in inner ring
J ₁	580 mm	Pitch circle diameter fixing holes in outer ring
d ₁	9,3 mm	Fixing holes diameter inner ring
d ₂	15 mm	Counterbore diameter of fixing holes
a	8,2 mm	Counterbore depth of fixing holes
	46	Quantity of fixing holes inner ring
d ₃	9,3 mm	Fixing holes diameter outer ring
	45	Quantity of fixing holes outer ring
n	48	Pitch quantity
t	7,5 °	Pitch separation angle
G	M12	Threaded extraction hole
	3	Quantity of threaded extraction hole
M _A	34 Nm	Screw tightening torque
	2	Quantity of retaining screws
t ₁	6 µm	Axial and radial runout, measurement standard; Measured on mounted bearing, with ideal adjacent construction.

Dimensions

H ₁	46 mm	Height contact face outer ring
	0,07 mm	Height contact face outerring H1 upper tolerance
	-0,08 mm	Height contact face outerring H1 lower tolerance
H ₂	24 mm	Height contact face outer ring
D _{1 max}	560,9 mm	Maximum diameter inner ring
C	22 mm	Width of outer ring

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.



Additional information

c_{aL}	16.000 N/μm	Axial rigidity of bearing position
c_{rL}	7.200 N/μm	Radial rigidity of bearing position
c_{kL}	504.000 Nm/mrad	Tilting rigidity of bearing position
c_{aW}	25.400 N/μm	Axial rigidity of rolling element set
c_{rW}	9.500 N/μm	Radial rigidity of rolling element set
c_{kW}	843.000 Nm/mrad	Tilting rigidity of rolling element set
M_m	7.379 kg*cm2	Mass moment of inertia for rotating outer ring
M_m	15.738 kg*cm2	Mass moment of inertia for rotating inner ring

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Momenty względem wszystkich osi
-  Smarowanie smarem
-  Bez uszczelnienia
-  Łożysko gabarytowe